




Paslode®



LCP45

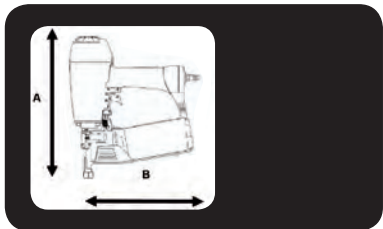

		A = 282 mm B = 275 mm C = 159 mm
		= 1.65 kg

	EN 12549+EN ISO 4871	L_{wA,1s} = 103.8 dBA L_{pA,1s} = 101.5 dBA L_{pA,1s,1m} = 90.8 dBA
1,2 L (6 bar) /	EN1996 : 1997 ISO 8662-11	Vibration = 3.1 m/s²
Ps max. = 8,3 bar		

150 x Paslode Nails 0° (GN Tape)	D= max. 7,0mm d = 2,5 - 2,8mm L = 25 - 35 mm
--	---



	Sequential trigger actuation/ Einzelauslösung/ enkelschots/ Déclenchement du tir - mode séquentiel/ Funcionamiento secuencial "en continuo"/ Gatilho de actuação sequencial/ funzionamento sequenziale (colpo a colpo)/ Enkeltskuds aftrækker/ Enkelskott/ Enkeltskudds avtrekker/ Kertalaukaisu/ Üksiklasu meetodil töötamine/ Uruchomienie spustu sekwencyjne/ Sekvenční spoušť/ Egyes lövés (szakaszosan működtetett elsőtű billentyűvel)/ Posamezno proženje/ Kontaktirajte singl / Последовательная активация при нажатии на курок/ Sekvenčná aktivácia spúšte/ التشغيل بالزر التسلسلي المقيد / Nuoseklusis paleidimo mechanizmas/ Sekvencialās palaišanas iedarbināšana Raðkveikjuvirkjun
---	--

Model: LCP45
No. 575896






0° COIL



GN-TAPE



CE






No. 617559

					 3x
No. 014748 + No. 576926		No. 576340	No. 014121		

Accessories

 No. 505203 Magazine insert	 No. 151299 / No. 576216 0,5 l oil / 1 l oil
--	---

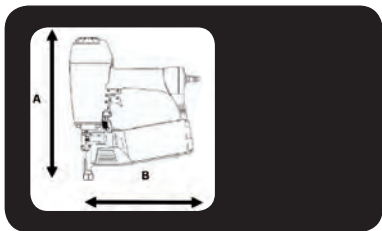

LCP45R

		A = 282 mm B = 275 mm C = 159 mm
		= 1.9 kg

 Min. 5,5 bar Max. 8,3 bar	 EN 12549+EN ISO 4871	L_{wA,1s} = 103.8 dBA L_{pA,1s} = 101.5 dBA L_{pA,1s,1m} = 90.8 dBA	
1,2 L (6 bar) / 	EN1996 : 1997  ISO 8662-11	Vibration	= 3.1 m/s²
Ps max. = 8,3 bar			

150 x Paslode Nails 0° (GN Tape)	D = max. 7,0 mm d = 2,3 - 2,5 mm L = 22 - 35 mm
--	--








Contact trigger actuation/ Kontaktauslösung/ repeterend schieten/ Déclenchement du tir - mode rafale/ Funcionamiento por contacto "clavo a clavo"/ Gatilho de actuação por contacto/ funzionamento a contatto/ Stødskydnings aftrækker/ Støtskjutning/ Støtspikrings avtrekker/ Kosketuslaukaisu/ Automaatmeetodil töötamine/ Uruchomienie spustu przez kontakt/ Kontaktní spoušť/ Sorozatlövés (folyamatosan behúzott elsütő billentyűvel)/ Kontaktno proženje/ Kontaktirajte pokretanje/ Контактная активация при нажатии на курок/ Kontaktná aktivácia spúšte/ التشغيل بتلامس الزر / Kontaktinis paleidimo mechanizmas/ Kontakta palaides iedarbināšana/ Snertikveikjuvirkjun

Model: LCP45R
No. 575909





ITW Befestigungssysteme GmbH
30966 Hemmingen, Germany











No. 617559

				 3x
No. 014748 + No. 576926		No. 014121		

Accessories

	
No. 505203 Magazine insert	No. 151299 / No. 576216 0,5 l oil / 1 l oil

LCP65

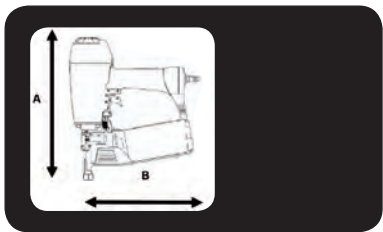


		A = 330 mm B = 312 mm C = 151 mm
		= 2,4 kg

	EN 12549+EN ISO 4871	L_{wA,1s} = 107.6 dBA L_{pA,1s} = 106.8 dBA L_{pA,1s,1m} = 94.6 dBA
1,7 L (6 bar) /	EN1996 : 1997 ISO 8662-11	Vibration = 4,0 m/s²
Ps max. = 8,3 bar		

150 x Paslode Nails 0° (GN Tape)	D= max. 8,0 mm d = 2,5 - 4,2 mm L = 32 - 65 mm
--	---




	Sequential trigger actuation/ Einzelauslösung/ enkelschots/ Déclenchement du tir - mode séquentiel/ Funcionamiento secuencial "en continuo"/ Gatilho de actuação sequencial/ funzionamento sequenziale (colpo a colpo)/ Enkeltskuds aftrækker/ Enkelskott/ Enkeltskudds avtrekker/ Kertalaukaisu/ Uksiklasu meetodil töötamine/ Uruchomienie spustu sekwencyjne/ Sekvenční spoušť/ Egyes lövés (szakaszosan működtetett elsütő billentyűvel)/ Posamezno proženje/ Kontaktirajte singl / Последовательная активация при нажатии на курок/ Sekvenčná aktivácia spúšte/ التشغيل بالزر التسلسلي المقفود / Nuoseklusis paleidimo mechanizmas/ Sekvencialās palaides iedarbināšana Raðkveikjувirkjun
	Contact trigger actuation/ Kontaktauslösung/ repeterend schieten/ Déclenchement du tir - mode rafale/ Funcionamiento por contacto "clavo a clavo"/ Gatilho de actuação por contacto/ funzionamento a contatto/ Stødskydnings aftrækker/ Støtskjutning/ Støtspikrings avtrekker/ Kosketuslaukaisu/ Automaatmeetodil töötamine/ Uruchomienie spustu przez kontakt/ Kontaktní spoušť/ Sorozatlövés (folyamatosan behúzott elsütő billentyűvel)/ Kontaktno proženje/ Kontaktirajte pokretanje/ Контактная активация при нажатии на курок/ Kontaktná aktivácia spúšte/ التشغيل بتلامس الزر / Kontaktinis paleidimo mechanizmas/ Kontakta palaides iedarbināšana/ Snertikveikjувirkjun

Model: LCP65		No. 575900			
					
				 No. 575641	
					
No. 014748 + No. 576926		No. 576340	No. 014121		

Accessories

		
No. 576487	No. 505203	No. 151299 / No. 576216
Hanger	Magazine insert	0,5 l oil / 1 l oil

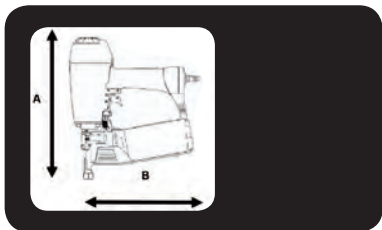

LCP45.1

		A = 293 mm B = 312 mm C = 151 mm = 2.1 kg
--	--	--


Min. 5,5 bar Max. 8,3 bar	L_{wA,1s} = 82.7 dBA L_{pA,1s} = 72.3 dBA L_{pA,1s,1m} = 69.7 dBA
1,4 L (6 bar) /	EN 12549+EN ISO 4871 EN1996 : 1997
Ps max. = 8,3 bar	Vibration = 4.4 m/s²

150 x Paslode Nails 0° (GN Tape)	D = max. 8,0 mm d = 2,5 - 4,0 mm L = 22 - 45 mm
--	---



	Sequential trigger actuation/ Einzelauslösung/ enkelschots/ Déclenchement du tir - mode séquentiel/ Funcionamiento secuencial "en continuo"/ Gatilho de actuação sequencial/ funzionamento sequenziale (colpo a colpo)/ Enkeltskuds aftrækker/ Enkelskott/ Enkeltskudds avtrekker/ Kertalaukaisu/ Üksiklasu meetodil töötamine/ Uruchomienie spustu sekwencyjne/ Sekvenční spoušť/ Egyes lövés (szakaszosan működtetett elsütő billentyűvel)/ Posamezno proženje/ Kontaktirajte singl / Последовательная активация при нажатии на курок/ Sekvenčná aktivácia spúšte/ التشغيل بالزر التسلسلي المقيد / Nuoseklusis paleidimo mechanizmas/ Sekvenciālās palaišanas iedarbināšana Raðkveikjувirkjun
--	---

Model: LCP45.1
No. 575898



ITW Befestigungssysteme GmbH
30966 Hemmingen, Germany




No. 617559




					
No. 014748 + No. 576926	No. 576340	No. 014121			

Accessories

No. 505203	No. 151299 / No. 576216
Magazine insert	0,5 l oil / 1 l oil

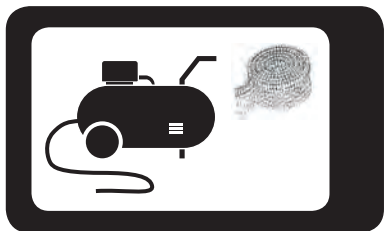

014 748

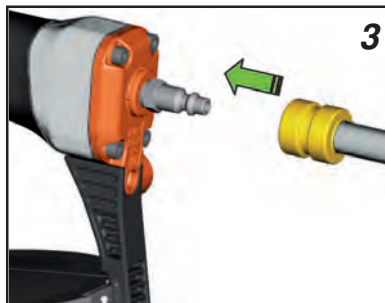


LCP45 + LCP45R: $L < 30$

LCP65: $L < 50 \text{ mm}$








+










No. 505203

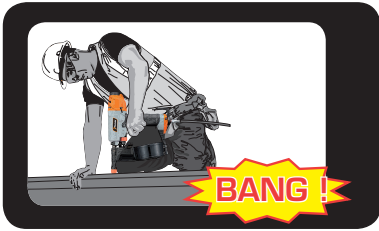

014 748

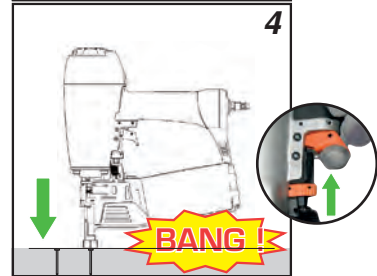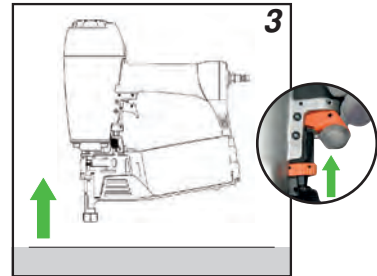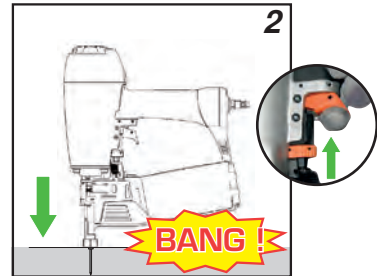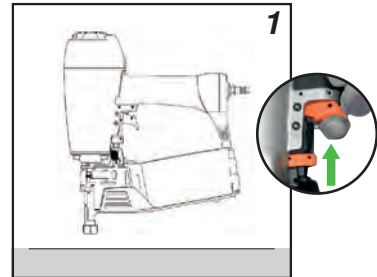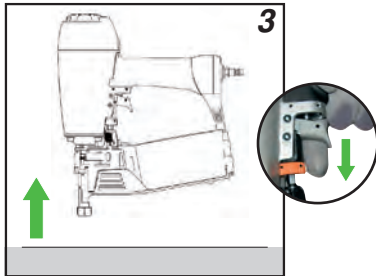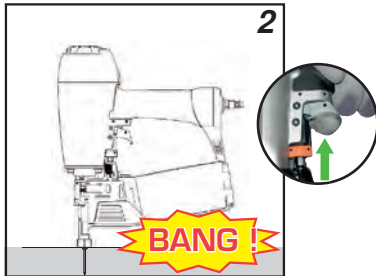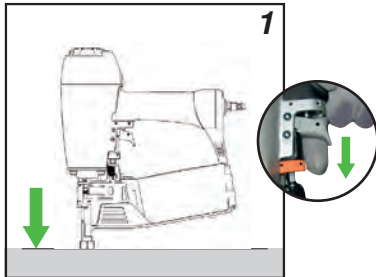

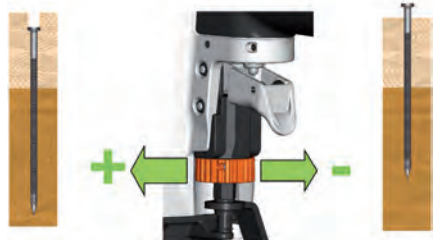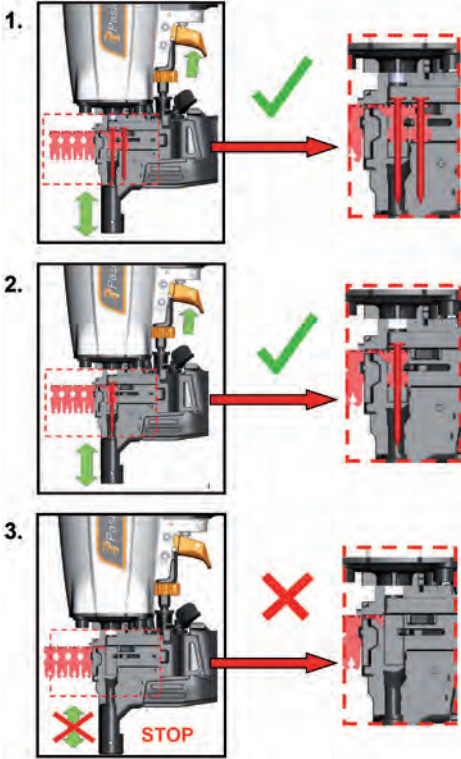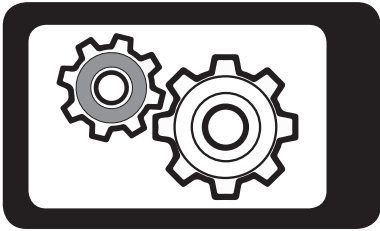

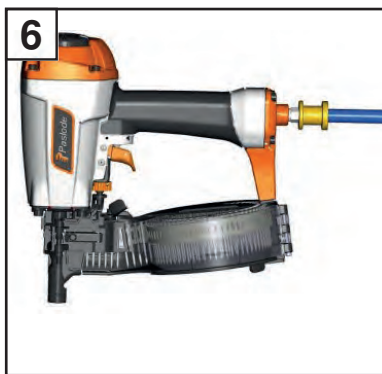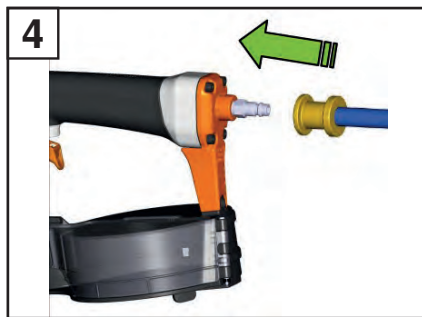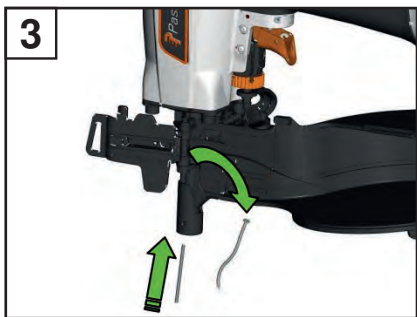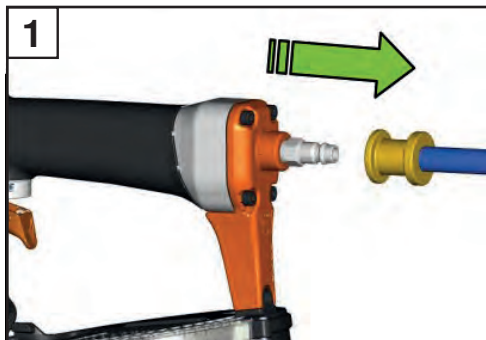

YY/WW....

YY= Year of manufacture
WW = Week of manufacture



**Resting position/ Ruheposition/ Position de repos/ Ruststand/
Posición de descanso/ Posizione di riposo/ Posição de des-
canso/ Pozycja spoczynku/ Klidová poloha/ Nyugalmi állapot/
Положение в нерабочем состоянии/ Θέση αδράνειας/ Hviles-
tilling/ Viloläge/ Hvileposisjon/ Lepoasento/ Položaj mirovanja/
Pokožová poloha/ Položaj mirovanja/ وضع السكون / Ramybės
padėtis/ Ooteasend/ Miera stāvoklis/ Hvíldarstaða**





ITW CONSTRUCTION PRODUCTS EUROPE
Code 575926 (05/2019)
www.spitpaslode.com