




haubold®

PN765A



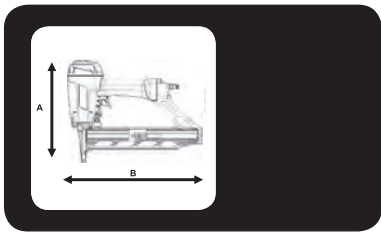

PN765A

		A = 315 mm B = 385 mm C = 94 mm = 3,2 kg
--	--	--

	 EN 12549+EN ISO 4871	L_{WA.1s} = 102 dBA L_{pA.1s} = 54 dBA L_{pA.1s1m} = 89 dBA
1,9 l (6 bar) /	EN 12096: 1997 ISO 8662-11	Vibration = 3,2 m/s²
Ps max. = 8,3 bar		

150 x =		
haubold staple	KG 700	B = 10,9 mm L = 32-65 mm d = 1,4x1,6 mm



Model: PN765A
No. 567445



PN765A PNEUMATIC STAPLER

Code : 567445

Trigger Actuation : Continuous Contact

STAPLE SPECIFICATION HAUBOLD KG700 SERIES

ITW Befestigungssysteme GmbH,
D-30566 Hemmingen, Germany.


			 2x
No. 014748 + No. 576517	No. 617244	No. 617245	No. 6172- 47/48

Accessories











No. 151299 / No. 576216

0,5 l oil / 1 l oil




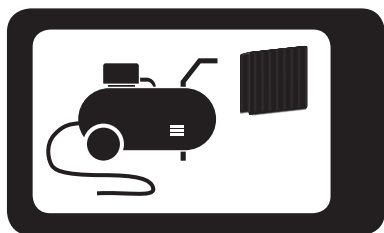







014 748


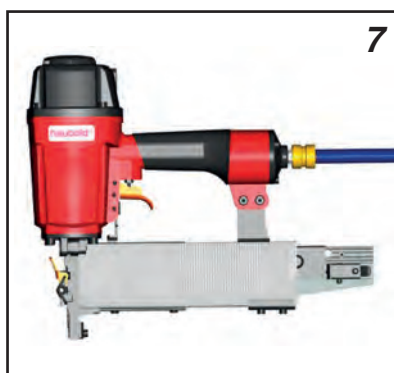



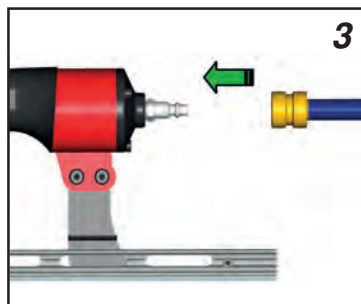




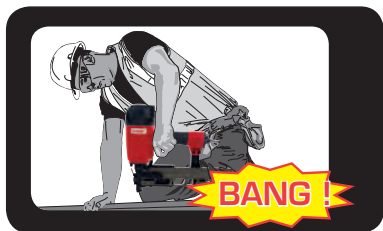

014 748

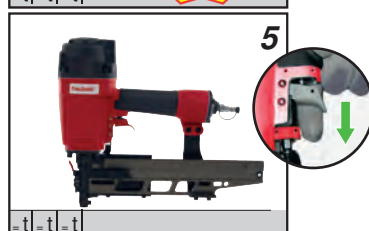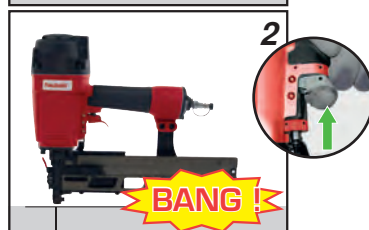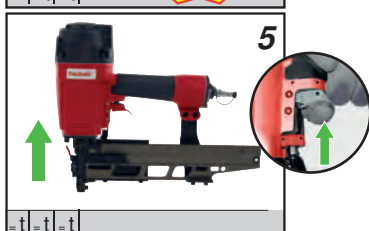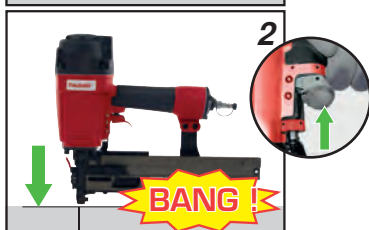

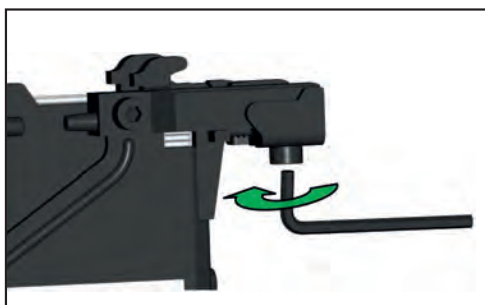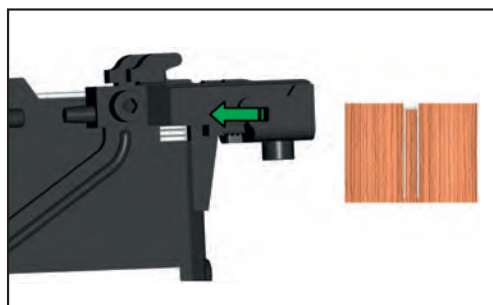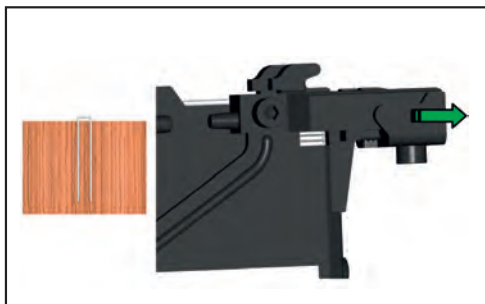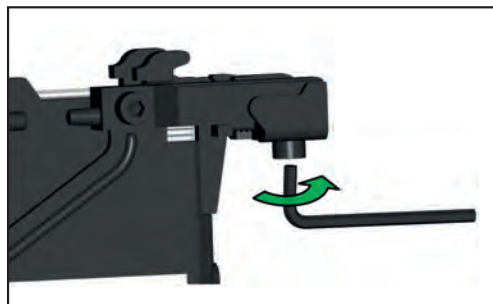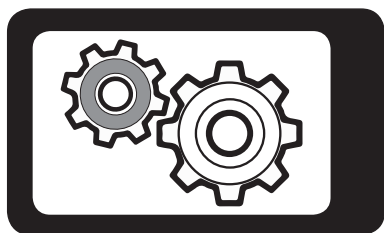





YY= Year of manufacture
WW = Week of manufacture

Resting position/ Ruheposition/ Position de repos/ Ruststand/ Posición de descanso/ Posizione di riposo/ Posição de descanso/ Pozycja spoczynku/ Klidová poloha/ Nyugalmi állapot/ Положение в нерабочем состоянии/ Θέση αδράνειας/ Hvilestilling/ Viloläge/ Hvileposisjon/ Lepoasento/ Položaj mirovanja/ Pokojová poloha/ Položaj mirovanja/ وضع السكون / Ramybės padėtis/ Ooteasend/ Miera stāvoklis/ Hvíldarstaða





ITW CONSTRUCTION PRODUCTS EUROPE
Code 576517 (05/2019)
www.spitpaslode.com